
## **CVC-812PC COLOR DOOR MOUNT CAMERA**

## Installation & Operation Instructions

Please review these instructions carefully before installation and operation.


## **FEATURES**:

- \* Weatherproof Operation
- \* High Resolution
- \* Electronic iris allows for application with varying lighting conditions
- \* Good low light sensitivity
- \* Maintenenance Free

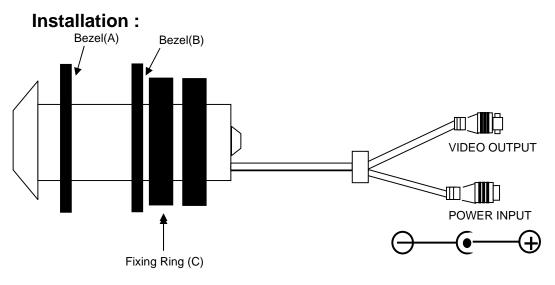

- 1. Place bezel(A) on the camera and then put the camera through the door.
- 2. Place bezel(B) on the camera.
- 3. Tighten the camera to the door using the two fixing rings (C).

Specifications	CVC - 812PC
Image Device	1/3" Interline CCD
Horizontal Resolution	350 TV Lines
Scanning System	2:1 Interlace
Built-In Lens	Standard 2.5mm Wide Angle
Synchronization	Internal
Output Signal	1Vp-p Composite Video, 75 ohms
Minimum Illumination	1.0 Lux
Shutter Control	Auto, 1/60 ~100,000
Power Supply	12V DC, 500mA (Regulated)
Weight	3.6oz(126g)
Housing	Metal / Black Color
Cable Length	40 Inches



## speco technologies

200 NEW HIGHWAY AMITYVILLE, N.Y. 11701-0726 631-957-8700 1-800-645-5516

Always use discretion when installing video and/or audio surveillance equipment especially when there is perceived privacy, or and expectation of privacy. Inquire regarding federal, state and/or local regulations applicable to the lawful installation of video and/or audio recording or surveillance equipment. Party consent may be required.